

# Distributed multi-hop cooperative communication in dense wireless sensor networks

Min Chen · Meikang Qiu · Linxia Liao ·  
Jongan Park · Jianhua Ma

© Springer Science+Business Media, LLC 2010

**Abstract** In this paper, we investigate the use of cooperative communications for high performance data dissemination in dense wireless sensor networks. We first identify the limitations of existing cooperative schemes. While we previously proposed a multi-hop cooperative data dissemination scheme, REER, to address these limitations, the construction of such structure relies on a pre-established reference path. The partially centralized approach makes REER unscalable when encountering network dynamics. To address this issue, this paper proposes a novel distributed multi-hop cooperative communication scheme (DMC), which is fully distributed and

---

M. Chen

School of Computer Science and Engineering, Seoul National University, Seoul 151-742, Korea  
e-mail: [minchen@ieee.org](mailto:minchen@ieee.org)

M. Chen

WISENET Lab, Hebei Polytechnic University, Tangshan, 063009, China

M. Qiu

Department of Electrical and Computer Engineering, University of Kentucky, Lexington, KY 40506, USA  
e-mail: [mqiu@engr.uky.edu](mailto:mqiu@engr.uky.edu)

L. Liao

Department of Computer Science, University of British Columbia, Vancouver, V6T 1Z4, Canada  
e-mail: [liao1x@cs.ubc.ca](mailto:liao1x@cs.ubc.ca)

J. Park (✉)

Department of Information and Communications Engineering, Chosun University, 375 Seosuk-dong, Dong-gu, Gwangju, 501-759, Korea  
e-mail: [jonganpark09@gmail.com](mailto:jonganpark09@gmail.com)

J. Ma

Faculty of Computer and Information Sciences, Hosei University, 3-7-2, Kajino-cho, Koganei-shi, Tokyo 184-8584, Japan  
e-mail: [jianhua@hosei.ac.jp](mailto:jianhua@hosei.ac.jp)



consists of two operation phases: (1) cooperative mesh structure (CMS) construction, and (2) CMS-based data dissemination, which includes random value-based scheme and distance-based scheme for forwarding node selection. Simulation results show that *DMC* performs well in terms of a number of QoS metrics, and fits well in large-scale networks and highly dynamic environments.

**Keywords** Cooperative communication · Wireless sensor networks · Data dissemination

## 1 Introduction

Wireless sensor networks (WSNs) have numerous potential applications, e.g., battlefield surveillance, medical care, wildlife monitoring and disaster response. In mission-critical applications, the wireless networks used for communications must ensure that data packets can be delivered to the data processing center reliably and efficiently. However, due to the dynamic nature of WSNs, time-varying wireless channel, and severe constraints on energy supply and communication bandwidth of battery-operated sensor nodes, providing high performance is a challenging issue, especially when deploying WSNs for multimedia surveillance.

One of recent technology for addressing this challenges is the use of cooperative communications, which have been proposed as a scalable, energy-efficient and error-resilient solution for data transmissions in wireless networks. Nodes in cooperative communication systems work cooperatively or relay data packets for each other, thus forming multiple transmission paths or virtual multiple-input–multiple-output (MIMO) systems to relay data packets to the destination without the need of multiple antennas at each node [1, 2]. By utilizing the broadcast nature of the wireless medium and spatial distribution of sensor nodes, cooperative communications can enhance the performance of WSNs, especially for improving network reliability.

Most previous work on cooperative communication is based on the following limitations:

- Nodes employ orthogonal channel access (FDMA, TDMA or CDMA),
- Channel states between sources and cooperative partners, sources and destinations, and cooperative partners and destinations are available at participating nodes,
- The destination node has full or partial knowledge of the cooperative assignments and the channel states between nodes.
- Most existing research has focused on the cooperation between a pair of users in one-hop communications [3–6]. Cooperations among multiple nodes are investigated in [5, 7]; however, the research is still limited to one-hop communications.

In order to apply cooperative communication in WSNs, the above limitations are needed to be addressed. In addition, practical sensor nodes employ time-division half-duplex transmissions, e.g., using the carrier-sensed multiple access with collision avoidance (CSMA/CA) protocol, so that they cannot transmit and receive signals simultaneously. Besides, due to the distributed nature of WSN applications, the sink node usually does not have knowledge of the channel states between the sensor nodes, as well as the cooperative partner selections and assignments.

As our previous solution, a cooperative communication scheme, REER [8], has been proposed for reliable and energy-efficient data dissemination in dense sensor networks. Based on geographical information, REER's design harnesses the advantages of high node density and relies on the collective efforts of multiple cooperative nodes to deliver data, without depending on any individual ones. It has the following features:

- The network can be easily extended to accommodate multi-hop communications.
- By utilizing the broadcast nature of the wireless medium and spatial distribution of sensor nodes, cooperative communications are used to improve the network performance of WSNs.
- No inter-node channel state information needs to be maintained.
- Dense sensor network favors the scheme to yield enough cooperative nodes.

However, the construction of cooperative structure in REER relies on a pre-established reference path. The partially centralized approach makes it unscalable when encountering network dynamics. To address this issue, this paper proposes a novel distributed multi-hop cooperative communication scheme (DMC), which is fully distributed and optimal network performance can be achieved without the need of maintaining precise network state information and centralized control. It consists of two operation phases:

- *cooperative mesh structure (CMS) construction*: the source node initiates the construction by transmitting a prob message. Among the cooperative nodes at each hop, a master node will decide the cooperative nodes and another master node for its next hop. The construction will terminate when the sink receives the probe message.
- *CMS-based data dissemination*: data packets originated from the source are forwarded to the sink node by groups of cooperative nodes (denoted as *CNs*) relaying. In each group of *CNs*, a node will be elected as the forwarding node to forward the data packet to the adjacent group of *CNs* towards the sink node. We propose two simple schemes for forwarding node selection, i.e., random value-based scheme and distance-based scheme.

Simulation results show that *DMC* performs well in terms of a number of QoS metrics, and fits well in large-scale networks and highly dynamic environments. The rest of the paper is organized as follows. Section 2 presents related work. The problem is stated in Sect. 3. We present CMS construction and CMS-based data dissemination in Sects. 4 and 5, respectively. Our simulation studies are reported in Sect. 6. Finally, Sect. 7 concludes the paper and presents the future work.

## 2 Related works

A large number of cooperative communication protocols have been proposed recently. Cooperation diversity gains, transmitting, receiving and processing overheads, are investigated by [9]. Cooperative issues across the different layers of the communication protocol stack, self-interested behaviors and possible misbehaviors are explored in [10]. Reference [11] proposed a cooperative relay framework which accommodates the physical, medium access control (MAC) and network layers for wireless

ad hoc networks. In the network layer, diversity gains can be achieved by selecting two cooperative relays based on the average link signal-to-noise ratio (SNR) and the two-hop neighborhood information. A cooperative communication scheme combining relay selection with power control is proposed in [12], where the potential relays compute individually the required transmission power to participate in the cooperative communications. A variety of cooperative diversity protocols are proposed by [13], namely, amplify-and-forward, decode-and-forward, selection relaying, and incremental relaying. The performance of the protocols in terms of outage events and associated outage probabilities is evaluated respectively. Coded cooperation [14], integrated cooperation with channel coding and works by sending different parts of each user's code word via two independent fading paths. References [15, 16] implemented a cooperation strategy for mobile users in a conventional code division multiple access (CDMA) systems, in which users are active and use different spreading code to avoid interferences. In [17], distributed cooperative protocols, including random selection, received SNR selection and fixed priority selection, and are proposed for cooperative partner selection. The outage probability of the protocols is analyzed respectively. CoopMAC, a cooperative MAC protocol for IEEE 802.11 wireless networks, is presented by [18]. CoopMAC can achieve performance improvements by exploiting both the broadcast nature of the wireless channel and cooperative diversity. REER, a scalable, energy-efficient and error-resilient routing protocol for dense WSNs is proposed by [8]. To construct a multi-hop mesh cooperative structure, a set of nodes, termed as reference nodes (denoted as *RNs*) between the source node and the sink node (the source and the sink are also *RNs*) is first selected. The *RNs* are determined sequentially starting from the source to the sink, and the distance between two adjacent *RNs* is an application-specific value, which is a trade-off between reliability and energy efficiency. Once the *RNs* are determined, a set of nodes around each *RN* will be selected as the cooperative nodes (denoted as *CNs*), and thus, a multi-hop mesh cooperative structure is constructed in this phase. Data packets originated from the source will be forwarded to the sink by groups of *CNs* relaying, without depending on any individual ones.


Our idea is also close to some works regarding opportunistic communication, such as GeRaF [19] and ExOR [20] where efficient methods of using multi-receiver diversity for packet forwarding are explored. However, unlike GeRaF and ExOR, the proposed scheme only uses a certain number of cooperative neighbors while achieving the application-specific requirement of reliability. The number of cooperative nodes can be flexibly adjusted to cope with network dynamics.

### 3 Problem statement

#### 3.1 Architecture overview of REER

Figure 1 shows the architecture of REER scheme [8]. The sink node first sends an interest packet representing the application-specific requirements to the networks. When the interest packet is received by the source node, it starts generating reports on the detected events as specified. Before delivering the reports to the sink via multi-hop

**Fig. 1** Illustration of REER scheme

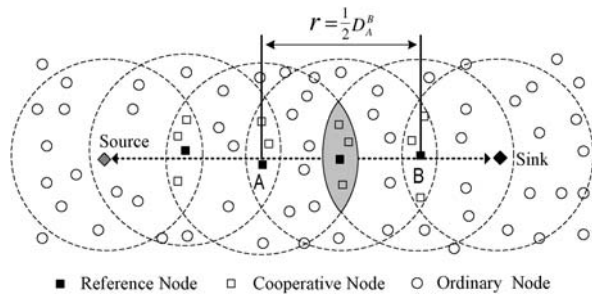

routing, the source node initiates multi-hop mesh cooperative structure construction by sending a probe message towards the sink.

During the transmission of the probe message, a set of nodes, termed reference nodes between the source and the sink are first selected, such that the distance between two adjacent reference nodes is sought to be an application-specific value (denoted by  $r$  in Fig. 1).

REER considers the following facts regarding the introduction of  $r$ :

1. For any two reference nodes (e.g.,  $A$  and  $B$  in Fig. 1) which are two hops away, nodes located in the area intersected by the two coverage circles centered around  $A$  and  $B$  can communicate with both  $A$  and  $B$ , as shown in the shadow area in Fig. 1.
2. If the distance (denoted by  $D_A^B$ ) between  $A$  and  $B$  decreases, the size of the intersecting area increases, thus accommodating more nodes that can forward data packets cooperatively.
3. When more cooperative nodes are involved in the data dissemination, a higher reliability is provided.


The rationale of REER is to adjust the value of  $r = \frac{1}{2} \cdot D_A^B$  to provide a control knob to trade off robustness and energy efficiency (and latency). In order to achieve the required reliability while meeting the application-specific quality of service (QoS) requirements (e.g. reliability, and end-to-end latency bound),  $r$  is adaptively set by the source or sink node. The reference nodes are determined sequentially, starting from the source node. After a certain timer expires, the reference nodes determine a set of cooperative nodes around each of them based on the coverage of the probe messages they sent during the reference node selection period.

In the data dissemination phase, the data forwarding node is selected among the cooperative nodes at each hop through a receiver-oriented approach [21]. The reference node selection, cooperative nodes selection, and forwarding node selection mechanisms are detailed in [8].

### 3.2 Motivation of DMC proposal


In this section, we will illustrate the motivation to propose DMC, and present the DMC architecture in brief. Figure 2 shows a part of the mesh structure. Let  $V_h$  denote the  $n$ th cooperative group;  $V_{h-1}$  denote  $V_h$ 's adjacent group one hop closer to the source, while  $V_{h+1}$  denote  $V_h$ 's adjacent group one hop closer to the sink. Let  $RN_{n-1}$ ,



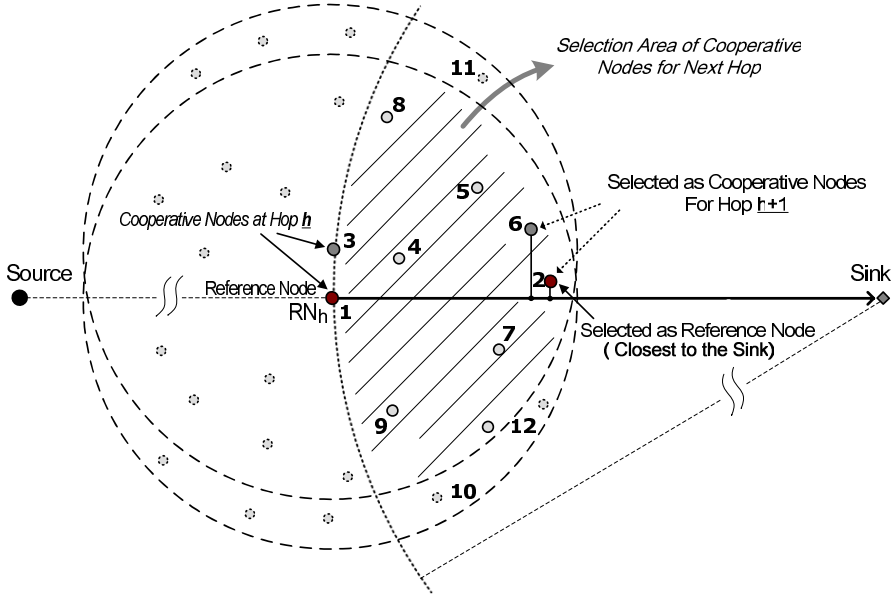

**Fig. 3** Illustration of cooperative nodes selection in DMC

**Fig. 4** Probe message format

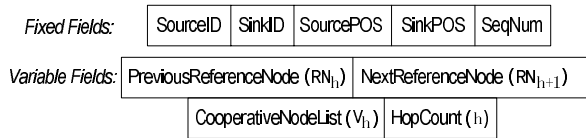

This operation will be repeated, and let us assume that the probe message arrives  $RN_h$  which is  $h$  hops away from the source. As shown in Fig. 3, the cooperative node set at hop  $h$  (denoted by  $V_h$ ) includes nodes 1 and 3. As the reference node at hop  $h$ , node 1 will select cooperative node set for its next hop. Since  $N$  is set to two, nodes 2 and 6 are selected in the selection area of cooperative nodes. The determination of the selection area will be detailed in Sect. 4.2. Between nodes 2 and 6, node 6 is further selected as the reference node for hop  $h + 1$  due to its closest distance to the sink node. Then,  $RN_h$ , node 1, transmits the probe message to node 2. The construction of the mesh will continue until the probe message arrives at the sink nodes.

#### 4.2 Determination of the cooperative node selection area

As shown in Fig. 2, in order to construct an ideal multi-hop mesh cooperative structure, each node in  $V_h$  should be fully connected with all the nodes in  $V_{h+1}$ . *Cooperative selection area* of  $RN_h$  means that the nodes in the area can be connected to all the nodes in  $V_h$ . As shown in Fig. 3,  $RN_h$  will first mark the neighbors in the

**Table 1** Pseudo-code for the determination of the cooperative node selection area at node  $RN_h$ 

01	<b>procedure</b> SelectionAreaDetermination ( $Q_h$ )
02	<b>begin</b>
03	$Q_h$ is the set of node $RN_h$ 's neighbors in the forwarding area;
04	$f_i$ is the flag indicating whether node $i$ ( $i \in Q_h$ ) is included in the selection area;
05	$R$ is the maximum transmission range;
06	<b>for</b> each neighbor $i$ in $Q_h$
07	$f_i \leftarrow 1$ ;
08	<b>for</b> each cooperative node $k$ in ( $V_h - RN_h$ )
09	Calculate the distance between $i$ and $k$ , $d_i^k$ ;
10	<b>if</b> $d_i^k > R$
11	$f_i \leftarrow 0$ ;
12	break <b>for</b> ;
13	<b>endif</b>
14	<b>endfor</b>
15	<b>endfor</b>

forwarding area<sup>2</sup> as the preliminary candidate nodes (denoted by  $Q_h$ ). For each node in  $Q_h$ , the nodes that cannot be connected to all of the other cooperative nodes in  $V_h$  will be filtered. Given the example shown in Fig. 3,  $Q_h$  includes nodes 2, 4–11, and nodes 10, 11 are excluded because they cannot reach the other cooperative node (i.e., node 3). Table 1 shows the pseudo-code of the algorithm for determining the cooperative node selection area.

### 4.3 Cooperative node selection mechanism

Before  $RN_h$  determines the cooperative nodes at hop  $h + 1$ , it first checks whether the sink node is within its one hop range. Should that be the case, it further checks whether the other cooperative nodes at hop  $h$  can reach the sink node. Only if all of nodes in  $V_h$  can be connected to the sink node,  $RN_h$  delivers the probe message to the sink without cooperative node selection. Otherwise, in the pre-determined cooperative node selection area,  $RN_h$  will select  $N$  nodes which are closest to the sink as the cooperative nodes for the next hop, as shown in Table 2.

### 4.4 Reference node selection mechanism

In global perspective, DMC algorithm is distributed. However, in order to facilitate the selection of cooperative nodes and delivery of the probe message, a reference node is still needed as a local coordinator for each hop. Table 3 shows the pseudo-code of reference-node-selection at node  $RN_h$ . Among the previously selected cooperative nodes in  $V_{h+1}$ , the next reference node is the one whose distance to the sink node is minimal. The selected reference node will continue to transmit the probe message, and so forth, until the sink node is reached.

<sup>2</sup>In the forwarding area, the neighbors are closer to the sink node than  $RN_h$ .

**Table 2** Pseudo-code for cooperative nodes selection at node  $RN_h$ 


---

01	<b>procedure</b> CooperativeNodeSelection ( $Q_h$ )
02	<b>begin</b>
03	$Q_h$ is the set of node $RN_h$ 's neighbors in the forwarding area;
04	$f_i$ is the flag indicating whether node $i$ ( $i \in Q_h$ ) is included in the selection area;
05	<b>if</b> sink node is within one hop distance of all the cooperative nodes in $V_h$
06	Send the probe message to the sink node;
07	<b>else</b>
08	Among the nodes: $\{v_i, f_i = 1   i \in Q_h\}$
	Select $N$ nodes which are closest to the sink as $V_{h+1}$ ;
09	<b>endif</b>

---

**Table 3** Pseudo-code for reference node selection at node  $RN_h$ 


---

01	<b>procedure</b> ReferenceNodeSelection ( $V_{h+1}$ )
02	<b>begin</b>
03	$V_{h+1}$ is the set of cooperative nodes selected by $RN_h$ ;
04	<b>for</b> each cooperative node $k$ in $V_{h+1}$
05	Calculate the distance from $k$ to the sink node, $d_k^t$ ;
07	<b>endfor</b>
08	<b>for</b> each cooperative node $i$ in $V_{h+1}$
09	<b>if</b> $d_i^t = \min\{d_j^t   j \in V_{h+1}\}$
10	Select $i$ as <i>NextReferenceNode</i> ;
11	Break;
12	<b>endif</b>
13	<b>endfor</b>


---

## 5 CMS-based data dissemination in DMC

After the cooperative mesh structure (CMS) is built up, each data packet will be forwarded towards the sink node through group-by-group relaying. Figure 2 shows all the possible wireless links between two consecutive cooperative groups. While the quality of each of the links varies over time, the mesh structure makes data transmissions robust to link dynamics; i.e., data broadcasting is exploited to attain high reliability. This strategy provides an effective trade-off between traditional multipath routing and single path routing schemes. That is, it has the advantage of error resilience as in multipath (or mesh) routing schemes, but without the associated overhead of sending multiple copies of the same packet.

### 5.1 Random value-based scheme

In random value-based scheme, one cooperative node will be selected as the data forwarding node using a time-based mechanism as follows. Initially, every cooperative node starts a so-called Forwarding-Node-Selection-Timer (FNS-Timer), which

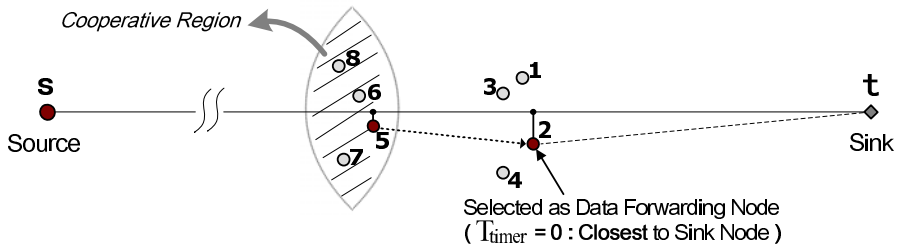

**Fig. 5** Illustration of data forwarding node selection in distance-based strategy

is set to a random value. The cooperative node whose FNS-Timer expires first will be selected as the data forwarding node; i.e., a smaller timer value indicates that the corresponding cooperative node has a higher eligibility. The winning node broadcasts an election notification message within the cooperative region, as shown in Fig. 5. When other cooperative nodes within the same cooperative region receive the notification message, they will cancel their FNS-Timers. Next, the data forwarding node will broadcast data packet towards the sink node, and so forth.

## 5.2 Distance-based scheme

### 5.2.1 Calculating minimum and maximum distances to sink node

We assume that each sensor node  $i$  knows its cooperative nodes' positions (including its own position), and the sink's location  $(x_t, y_t)$ . For example, in Fig. 5, node 1 knows the positions of nodes 1, 2, 3 and 4, while node 5 knows the positions of nodes 5, 6, 7 and 8.

Let  $V_h$  be the set of node  $i$ 's cooperative nodes in the  $h$ th hop's cooperative region. Node  $i$  can compute the distance between any cooperative node and the sink node as

$$D_t^k = \sqrt{(y_t - y_k)^2 + (x_t - x_k)^2}, \quad (1)$$

where  $k \in V_h$ , and  $(x_k, y_k)$  is the location of node  $k$ .

Then, node  $i$  can figure out which cooperative node is the closest one to the sink, and which one is the farthest one from the sink. Let  $D_{\min}$  and  $D_{\max}$  denote the minimum and maximum distance between the sink and cooperative nodes in  $V_h$ .

### 5.2.2 Time-based next-hop-election

Let  $T_{\text{timer}}$  denote the value of the FNS-timer.  $T_{\text{timer}}$  has been set by the current cooperative node to elect itself for next-hop data forwarding during the data dissemination. Let  $T_{\max}$  denote the maximum possible value of the FNS-timer.

Based on  $D_{\min}$ ,  $D_{\max}$  and node  $i$ 's own distance to sink  $D_t^i$ , node  $i$  can calculate its timer value by (2):

$$T_{\text{timer}}^i = \frac{D_t^i - D_{\min}}{D_{\max} - D_{\min}} \cdot T_{\max}. \quad (2)$$

**Table 4** Pseudo-code for setting time value for FNS-timer

01	<b>procedure</b> NextHopSelection ( $V_h$ )
02	$V_h$ is the set of cooperative nodes in the $h$ th
03	hop's forwarding area;
04	$i$ is one of the cooperative nodes in $V_h$ ;
05	$D_{\min}$ is the minimum distance between sink
06	and cooperative nodes in $V_h$ ;
07	$D_{\max}$ is the maximum distance between sink
08	and cooperative nodes in $V_h$ ;
09	<b>begin</b>
10	calculate $D_{\min} = \min\{D_r^k   k \in V_h\}$
11	calculate $D_{\max} = \max\{D_r^k   k \in V_h\}$
12	calculate $T_{\text{timer}}^i$ according to Eqn. (2);
13	Set $T_{\text{timer}}^i$ to node $i$ 's FNS-timer;
14	<b>end</b>

In the case that node  $i$  is the closest cooperative node to the sink (e.g., nodes 2 and 5 in Fig. 5),  $T_{\text{timer}}^i$  will be equal to 0. Furthermore, if node  $i$  receives a data packet broadcast by its previous hop node successfully, it will forward the data packet due to its FNS-timer expiring before those of the other cooperative nodes in  $V_h$ .

## 6 Performance evaluations

We implement our protocols and perform simulations using OPNET Modeler. The sensor nodes are uniformly random;y deployed over a 1000 m × 500 m field. To verify the scaling property of mesh cooperation-based schemes, we select a large-scale network scenario with 800 nodes. The source nodes are deployed at the left side of the field and one sink is located on the right side. The sensor application module consists of a constant-bit-rate source, which generates 1024 bits every 100 ms. As in [22], we use IEEE 802.11 Distributed Coordinate Function as the underlying medium access control (MAC), and the radio transmission range ( $R$ ) is set to 60 m. The data rate of the wireless channel is 1 Mb/s. All messages are 64 bits in length. We assume both the sink and sensor nodes are stationary. For consistency, we use the same energy consumption model as in [22]. The transmit, receive and idle power consumptions are 0.66 W, 0.395 W, and 0.035 W, respectively. The initial energy of each node is 12 Joules. We account for energy consumption in the simulations, in terms of transmissions, receptions, overhearing, collisions and other unsuccessful transmissions, MAC layer headers, retransmissions, and control frames such as RTS/CTS/ACKs. The following performance metrics are considered:

- *Packet delivery ratio*: It is the ratio of the number of data packets delivered to the sink, to the number of packets generated by the source nodes.
- *Average End-to-end Packet Delay*: including all possible delays during data dissemination, caused by queuing, channel access delay, retransmission due to packet collision and loss, and packet transmission time.

- *Average Communication Energy*: the total communication energy consumption, including transmitting, receiving, retransmissions, overhearing and collision, over the total number of distinct reports received at the sink.
- *Average Hop Counts*: It is the number of hop counts of a path from the source to the sink.
- *Lifetime*: the time when the first node exhausts its energy.


Figure 6 shows the snapshot of an OPNET simulation, which illustrates the result of mesh cooperative structure construction. The OPNET animation can be referred to [23]. At each hop, one of the cooperative nodes elects itself successfully to forward the data packet.

### 6.1 Impact of cooperative node number on the performance of DMC


In this section, we denote  $N$  as the number of cooperative nodes in each cooperative group. We change  $N$  from 2 to 6. In each group of experiments, we change link failure ratio from 0.05 to 0.55 by the step size of 0.05. Random value-based scheme is used in the data dissemination phase.

Let  $P$  denote the packet delivery ratio. Let  $H(N)$  denote the hop counts between the source and the sink when  $N$  cooperative nodes are used at each hop. Let  $f$  be the

**Fig. 6** A snapshot of simulation animation

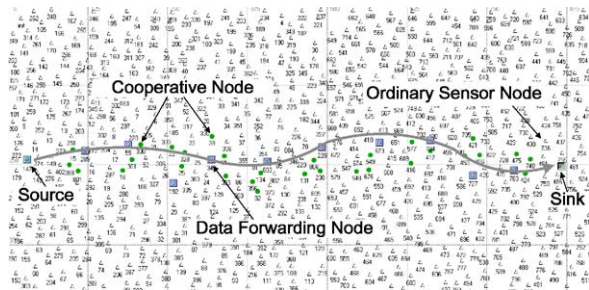

**Fig. 7** The comparison of average packet delivery ratio

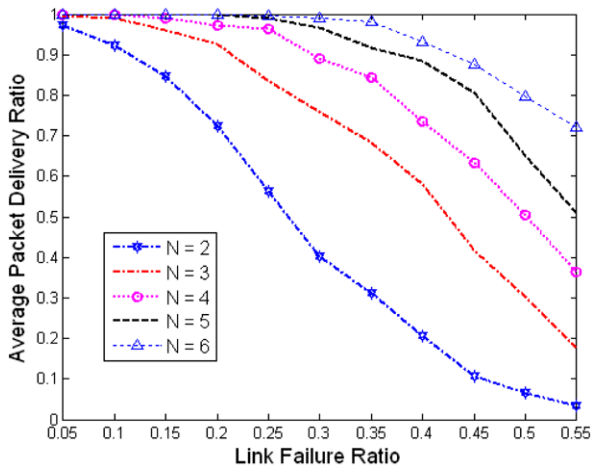

failure probability of each link/node. Let  $p$  denote the successful delivery probability of data packet at each hop. Then,

$$P = p^H = (1 - f^N)^H(N). \tag{3}$$

According to (3), the larger is  $N$ , the higher reliability can be obtained, which is observed in Fig. 7. When  $N$  is up to 6, the packet delivery ratio keeps higher than 95% if link failure ratio is smaller than 35%. By comparison,  $P$  is much lower (i.e., 30%) when  $N$  is equal to 2. It is expected that  $P$  is lower in traditional shortest path scheme.

Figure 8(a) shows the curves of delay performance. When  $N$  is equal to 6, the delay is the lowest. Note that the setting of the maximum backoff delay plays an important role in the delay performance, since random value-based scheme is adopted in our experiments.

As shown in Fig. 8(b), the average communication energy per successful data delivery is increased when link failure ratio becomes larger. The energy in  $N = 2$  case increases exponentially with link failure ratio increasing. It is because the packet delivery ratio is very low when the number of cooperative nodes is not sufficient in unreliable environments.<sup>3</sup>

Figure 8(c) shows the comparison of hop counts when different  $N$  is used. As described in Sect. 4.2, the larger is  $N$ , the smaller is the cooperative selection area, thus causing hop distance shorter and hop count larger. Thus, the superior performance with more cooperative nodes involved in the data dissemination is compromised by a larger hop count. As shown in Fig. 8(c), the  $N = 6$  case uses about three more hops than  $N = 2$  case. However, such trade-offs are valuable in unreliable and dynamic environments.

## 6.2 Comparison of random-based and distance-based schemes for data dissemination in DMC


As shown in Fig. 9, the end-to-end packet delay of the distance-based scheme is always much lower than that of the random value-based scheme. When there is no link failure, the cooperative node with the least FNS-timer value will forward the data packet. In the distance-based scheme, the cooperative node which is the closest to the sink node will win the election, and thus there is no backoff time before data forwarding under a good channel condition. By comparison, the backoff time at  $h$ th hop in the random value-based scheme [8] is equal to

$$T_{\text{backoff}} = \min\{T_{\text{timer}}^k | k \in V_h\} \tag{4}$$


where  $T_{\text{timer}}^k = \text{rand}(0, T_{\text{max}})$ . The delay performance depends on the setting of the maximum backoff time value  $T_{\text{max}}$ . Large  $T_{\text{max}}$  helps to reduce the possibility of simultaneous data broadcasting, while a small value of  $T_{\text{max}}$  decreases the data latency.

<sup>3</sup>The average communication energy is equal to the network energy consumption divided by the number of successful data packet deliveries.


**Fig. 8** Impact of cooperative node number on the performance of DMC in unreliable environments

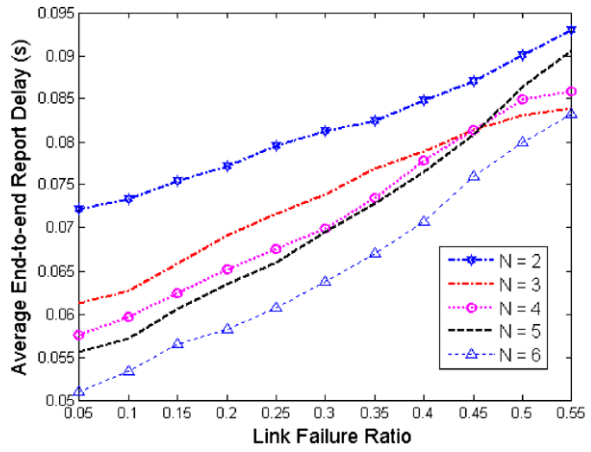

(a) The Comparison of Average End-to-end Packet Delay

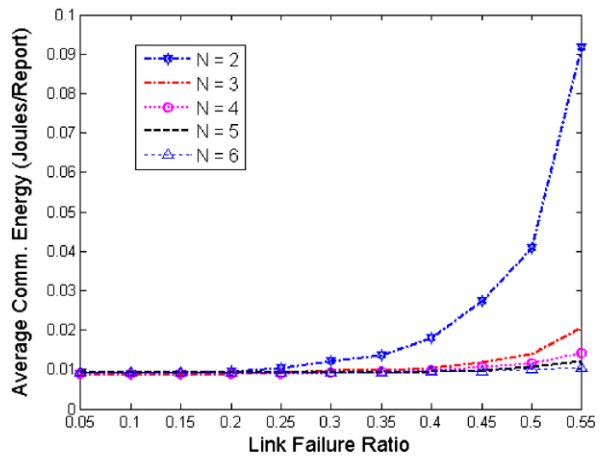


(b) The Comparison of Average Communication Energy

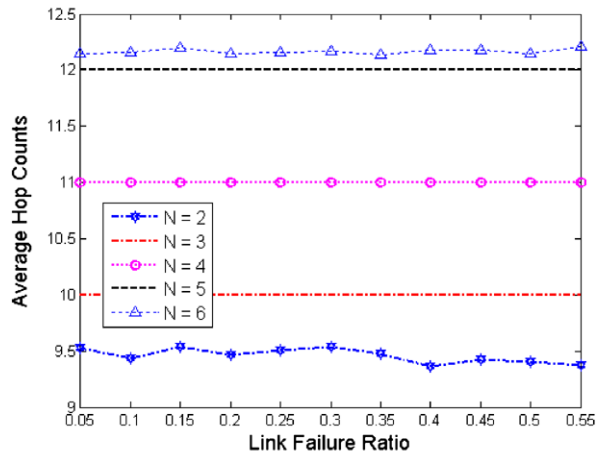

(c) The Comparison of Average Hop Counts

**Table 5** Comparison of lifetime for random value-based scheme and distance-based scheme

Scheme	$f = 0$	$f = 0.2$
Random value-based:	7.92 (minutes)	10.9 (minutes)
Distance-based:	8.98 (minutes)	11.4 (minutes)

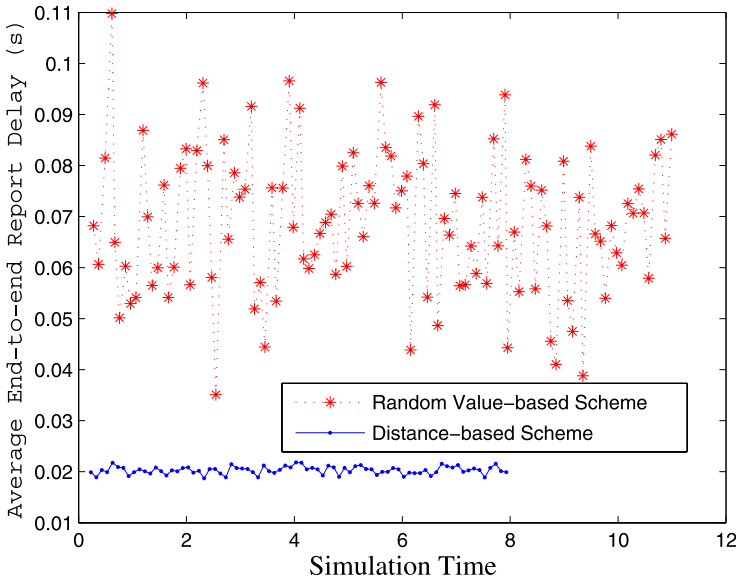


**Fig. 9** Comparisons of end-to-end delay with link failure ratio = 0

In our simulations, we set  $T_{max}$  according to the average number of cooperative nodes in the cooperative region [8].

Figure 10 shows the comparison of end-to-end delays when the link failure ratio is equal to 20%. The end-to-end packet delay of the random value-based scheme is larger than that of the distance-based scheme in most cases. Comparing Fig. 9 to Fig. 10, the end-to-end packet delays of the distance-based scheme are larger when the link failure ratio increases. When the cooperative node with  $T_{timer} = 0$  fails to receive the broadcast data in an unreliable environment, extra backoff delay will be introduced.

The lifetime results in Table 5 show that the random value-based scheme has 38% more lifetime than the distance-based scheme under good channel conditions. And the random value-based scheme has 27% longer lifetime than the distance-based scheme when the link failure ratio is equal to 0.2. It is because the traffic load is more evenly distributed among the cooperative nodes in the random value-based scheme, while the distance-based scheme tends to select the cooperative nodes closer to the sink. Thus, the random value-based scheme achieves better load balancing than the distance-based scheme. We will address the load balancing issue in our future work. A hybrid criterion which combines the features of both distance-based and energy-

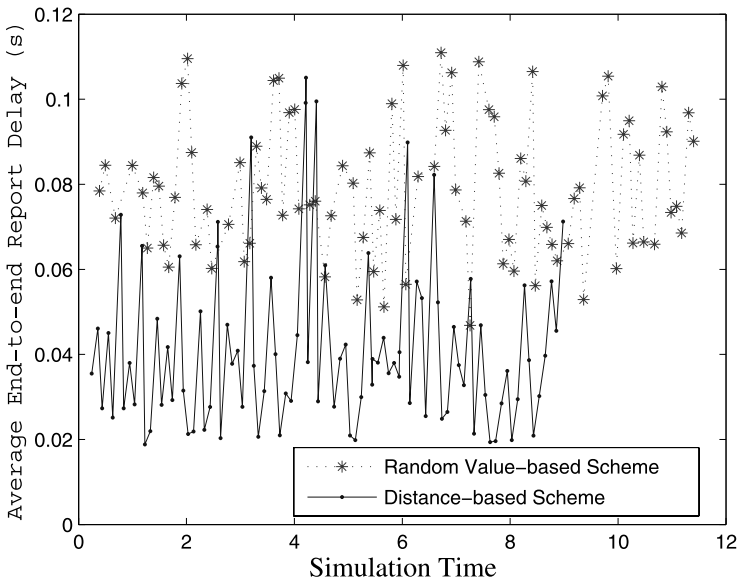

**Fig. 10** Comparisons of end-to-end delay with link failure ratio = 0.2

based criteria, will be proposed in order to facilitate load balancing, reliability and fast packet delivery in an unreliable environment.

## 7 Conclusion

The use of cooperative communications for reliable data dissemination is appealing in wireless sensor networks. However, some disadvantages exist in previous cooperative schemes. This paper considers the construction of “multi-hop mesh cooperative transmission structures” to address these disadvantages, and propose a novel distributed multi-hop cooperative communication scheme for data dissemination in dense sensor networks. Simulation results show that the proposed scheme scales well in handling difference network dynamics. Appealing performance is achieved when a sufficient number of cooperative nodes is used in unreliable environments. We will consider the more challenging case of utilizing multi-radio multi-channel technique to further improve the network performance in our future work. In order to guarantee the bandwidth requirement for multimedia transmission over wireless sensor networks, concurrent multipath transmission strategy will also be considered by exploiting the proposed multi-hop mesh cooperative transmission structures.

**Acknowledgement** This study was supported by research funds from Chosun University, 2010.

## References

1. Nosratinia A, Hunter T, Hedayat A (2004) Cooperative communication in wireless networks. *IEEE Commun Mag* 42(10):74–80

2. Hong Y-W, Huang W-J, Chiu F-H, Kuo C-CJ (2007) Cooperative communications in resource-constrained wireless networks. *IEEE Signal Process Mag* 42:47–57
3. Laneman JN, Tse DNC, Wornell GW (2004) Cooperative diversity in wireless networks: Efficient protocols and outage behavior. *IEEE Trans Inf Theory* 50(12):3062–3080
4. Hunter TE, Nosratinia A (2002) Cooperation diversity through coding. In: Proc IEEE 2002 international symposium on information theory (ISIT'02), Lausanne, Switzerland, June 2002, p 220
5. Hunter TE, Nosratinia A (2004) Distributed protocols for user cooperation in multi-user wireless networks. In: Proc IEEE the 47th annual global telecommunications conference (GLOBECOM'04), Dallas, Texas, USA, Nov 2004, pp 3788–3792
6. Liu P, Tao Z, Lin Z, Erkip E, Hivendra Panwar S (2006) Cooperative communication in wireless networks. *IEEE Wireless Commun* 13(10):84–92
7. Sendonaris A, Erkip E, Aazhang B (2007) Multinode cooperative communications in wireless networks. *IEEE Trans Signal Process* 55(1):341–355
8. Chen M, Kwon T, Mao S, Yuan Y, Leung V (2008) Reliable and energy-efficient routing protocol in dense wireless sensor networks. *Int J Sens Netw* 4(12):104–117
9. Sadek YWAK, Liu KR (2006) When does cooperation have better performance in sensor networks? In: Proceedings of the 3rd IEEE sensor and ad hoc communications and networks (SECON'06), 2006, pp 188–197
10. Conti EGM, Maselli G (2004) Cooperation issues in mobile ad hoc networks. In: Proceedings of the 24th international conference on distributed computing systems workshops (ICDCSW'04), 2004, pp 803–808
11. Lin JSY, Wong VW (2009) Cooperative protocols design for wireless ad hoc networks with multi-hop routing. *Mobile Netw Appl* 4(2):143–153
12. Zhou JCZ, Zhou S, Cui S (2008) Energy-efficient cooperative communication based on power control and selective single-relay in wireless sensor networks. *IEEE Trans Wireless Commun* 7(8):3066–3078
13. Laneman JN, Tse DNC, Wornell G (2004) Cooperative diversity in wireless networks: efficient protocols and outage behavior. *IEEE Trans Inf Theory* 50(12):3062–3080
14. Hunter T, Nosratinia A (2002) Cooperation. diversity through coding In: Proceedings of the IEEE international symposium on information theory (ISIT'02), 2002, pp 220
15. Sendonaris EEA, Aazhang B (2003) User cooperation diversity—part I: system description. *IEEE Trans Commun* 51(11):1927–1938
16. Sendonaris EEA, Aazhang B (2003) User cooperation diversity—part II: implementation aspects and performance analysis. *IEEE Trans Commun* 50(11):1939–948
17. Hunter T, Nosratinia A (2004) Distributed protocols for user cooperation in multi-user wireless networks. In: Proceedings of the 47th IEEE annual global telecommunications conference (GLOBECOM'04), 2004, pp 3788–3792
18. Liu ZLEEP, Tao Z, Panwar S (2006) Cooperative wireless communications: a cross-layer approach. *IEEE Wireless Commun* 13(4):84–92
19. Zorzi M, Rao RR (2003) Geographic random forwarding (GERAF) for ad hoc and sensor networks: multihop performance. *IEEE Trans Mobile Comput* 2(4):337–348
20. Biswas S, Morris R (2005) Exor: Opportunistic multi-hop routing for wireless networks. In: Proc ACM the 2005 annual conference of special interest group on data communication (SIGCOMM'05), Philadelphia, Pennsylvania, USA, Aug 2005, pp 133–134
21. Chen SMM, Leung V, Kwon T (2009) Receiver-oriented load-balancing and reliable routing in wireless sensor networks. *Wireless Commun Mobile Comput* 9(3):405–416
22. Intanagonwiwat C, Govindan R, Estrin D, Heidemann J, Silva F (2003) Directed diffusion for wireless sensor networking. *IEEE/ACM Trans Netw* 11(1):2–16
23. (2009) Available: <http://www.ece.ubc.ca/~minchen/file/mesh.exe>